



Technical Data Sheet

HydroPol™ 30124

Pellet Specification

Description

HydroPol™ 30124 is a modified co-polymer based on vinyl acetate hydrolysed monomers.

HydroPol™ 30124 has been specifically formulated for blown film

Properties

Particle Size 4-5 mm

Density 1.12 g/cm³

Peak Melting Temperature 225°C

Melt Flow Rate (230°C and 10kg) 4.2678

Non-Toxic

HydroPol™ 30124 is non-toxic and all raw materials are listed as approved as direct food additives and food contact by EU and US regulatory listings.

Barrier Properties

HydroPol™ 30124 has high resistance to animal, mineral and vegetable oils, aliphatic and aromatic hydrocarbons, ethers, esters and ketones. They also offer excellent barriers to Oxygen.

Biodegradable

HydroPol™ 30124 is inherently biodegradable. Biodegradation has been observed by at least 20 different genera of bacteria and several yeasts and moulds which occur in activated sludge, compost, facultative ponds, landfills, anaerobic digesters and septic systems and in natural soil and aquatic environments. Sturm (aquatic) biodegradation tests show that the formulations degrade in the presence of activated sewage sludge at a similar rate to cellulose.

HydroPol™ 30124 has shown no ecotoxicological effect in Marine environments according to ASTM D6691.

Testing for Composability and Anaerobic Digestion is ongoing.


Anti-Static

Because of their high hydroxyl group content and hygroscopicity, HydroPol™ compounds are inherently static dissipative, similar to cellophane, and cause little frictional static charging. Surface resistivities are in the range of 10⁵–10⁶ ohms/m².

Indicative Properties

Solubility

Each grade of HydroPol™ is engineered to solubilise at the maximum temperature for the right application.

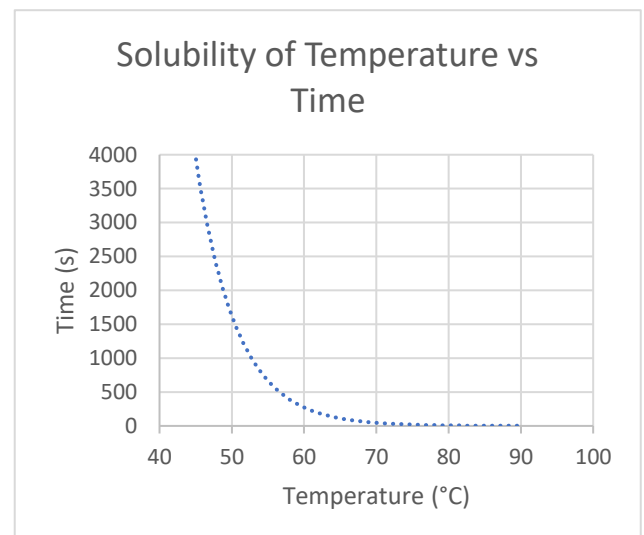

Technical Data Sheet

HydroPol™ 30124



Mechanical Property	Unit					Method
Tensile Strength on 25µm film	MPa	Stress at Maximum Load MD	41.949			ASTM D882
	%	Elongation at Break MD	125.543			
Tear Strength (Elmendorf) 23°C 50% RH	g	MD	543	CD	N/A	ISO 6383-2
Tear Strength (Elmendorf) 10°C 30% RH	g	MD	307	CD	N/A	
Dart puncture on 25µm film	g		52.5			ASTM 1709
Coefficient of Friction on 32µm film		Static	0.567	Dynamic	0.438	ASTM D1894-14
UV/A	%	Max	88.35	Average	83.94	
UV/B	%	Max	79.86	Average	77.89	
Light Transmission	%	Max	91.61	Average	90.90	
Seal Strength 0.5s @ 180°C	kN/m		TBC			ASTM F88

Barrier Properties

OTR: 0% RH and 23°C on 35 µm film	cc/m ² /24 hr	0.137			ISO 1505-2
MVTR:	g/m ² /24 hr	TBC	N/A	TBC	ASTM F1249
WVTR	g/m ² /24 hr	TBC			ISO 15106-2
Kit	1-12	12			Tappi T559
Cobb 60s	g/m ²	TBC			ISO 535

All data shown is indicative only. MD = Machine Direction CD = Cross Direction

Document Revision V1 July 2019

Commercial in Confidence

Typical Properties; these are not to be construed as specifications

